




L A M B O R G H I N I L M 0 0 2







The LM002 features luxurious, glove-soft leather seats and interior trim.

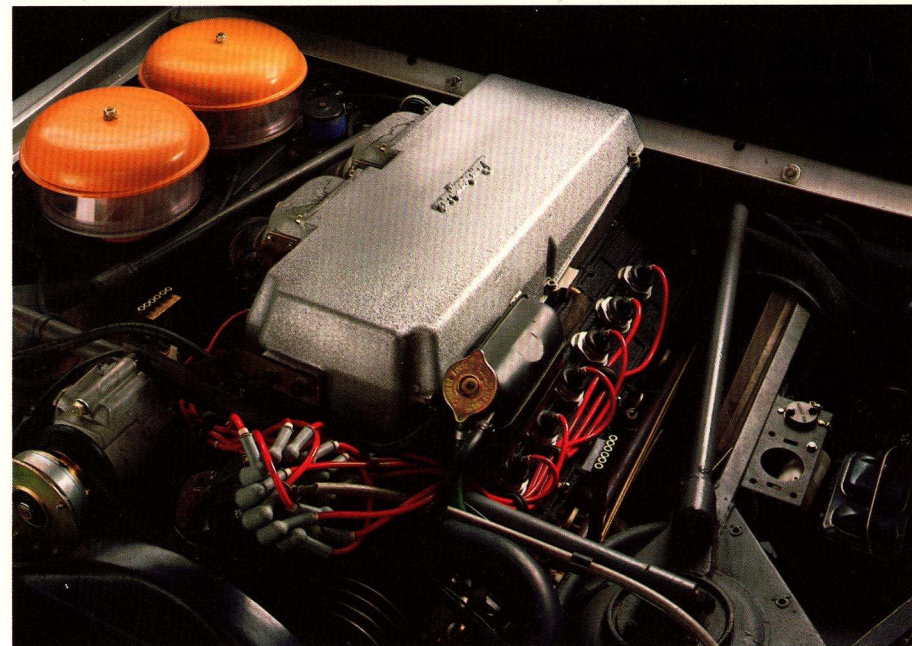

The LM002 standard 48-valve V-12 engine produces 455 hp @ 7,000 rpm.

# L A M B O R G H I N I

## — L M 0 0 2 —

### SPECIFICATIONS\*

#### GENERAL

Wheelbase	118.1"
Overall length	193.0"
Overall width	78.7"
Overall height	72.8"
Track (front and rear)	63.6"
Ground clearance	belly pan, center body area 16.7" under differential area only 11.6" approach angle 50° departure angle 45°
Curb-to-curb turning diameter	40.0'
Curb weight	5,990 lb
Fuel tank capacity	73.0 gal
Body	aluminum and fiberglass
Seats	four
Weight distribution	front 50% rear 50%

\*Specifications may be changed without notice.

#### POWER TRAIN AND CHASSIS

Layout	four-wheel drive, front engine w/disconnectable front axle and automatic variable torque distribution to each wheel
Chassis	tubular steel w/riveted and stuck aluminum panels
Engine	V-12 dual overhead camshaft w/four valves per cylinder
Bore and stroke	3.37" x 2.95"
Displacement	5.2 L
Compression ratio	9.5:1
Max. horsepower	455 @ 7,000 rpm
Max. torque	368 (lb-ft) @ 5,000 rpm
Carburetion	6-Weber (2v)
Transmission	ZF 5-speed manual
Gear ratios	5th 0.75:1 4th 1.00:1 3rd 1.30:1 2nd 1.79:1 1st 2.42:1 final axle ratio 4.11:1
Transfer case	2-speed 1.00:1 direct, 1.30 reduction

Steering	rack-and-pinion, power-assisted
Suspension	front and rear, independent w/double wishbones, coil springs and telescopic shock absorbers
Brake system	11.0" vented disc, front and rear vacuum-assisted
Tires	325/65 VR17 Pirelli off-road radials
Wheels	steel disc, 17" x 11"

#### PERFORMANCE

Speed on level ground (mph)	1st gear	37.3	1st reduced gear	12.4
	2nd gear	58.4	2nd reduced gear	19.3
	3rd gear	83.3	3rd reduced gear	28.0
	4th gear	111.2	4th reduced gear	37.3
	5th gear	124.9	5th reduced gear	42.0
0-62 mph acceleration	8.5 sec			
Cruising range	559.3 mi			